



PRODUCT NAME:

CCS1 TO CCS2 DC + AC ADAPTER

APPLICATION:

Convenient Charging for European Electric Vehicles in North America or other CCS1 standard country. This durable adapter let your CCS Combo 2 vehicle charge at full speed at all CCS Combo 1 quick charger stations.

SPECIFICATIONS:

Current: Max. 200A

Operating voltage: 200~1,000V DC
Insulation resistance: >1,000mΩ

Contact resistance: <5mΩ

Flame retardant grade: UL94-V0
Operating temperature: -30°C ~ 50°C
Pins: Copper alloy, silver plated

Service life: >10,000 times
Housing material: Plastic (PC + ABS)
Storage temperature: -40°C ~ +85°C

Protection function: Dust proof

Protection grade: IP54


Protection from dirt, dust, oil, and other non-corrosive material. Complete protection from contact with enclosed equipment. Protection from water, up to water projected by a nozzle against enclosure from any direction.

TRAVEL STORAGE CASE:

• The protect case provide full protection, CCS1 to CCS2 adapter storage case is made of premium eva, which is shockproof and dust resistance and skid-proof against impacts.





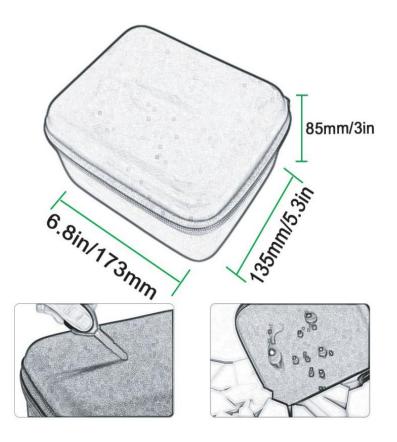

HOW TO USE:

- 1. Plug in the Combo 1 end of the adapter to the charging cable.
- 2. Plug in the Combo 2 end of the adapter to your EV's charging socket.
- 3. After the adapter has clicked it is ready for the charge. After you have done with the charging session, disconnect the vehicle side first and later the charging station side.

CAUTIONS:

- It's not a toy, keep away from your children.
- Clean only with dry cloth.
- Avoid dismantling, dropping or heavy impact.

STORAGE AND MAINTENANCE:

- Store the adapter in a cool, dry place.
- Regularly inspect the adapter for any signs of wear or damage.
- Clean the adapter with a dry cloth; do not use water or solvents.

WARRANTY:

- This product includes a 1-year warranty.
- In case of misuse, mishandling, negligence, vehicle accidents or modifications, the warranty will be voided. Our warranty only covers manufacturing defects.

