

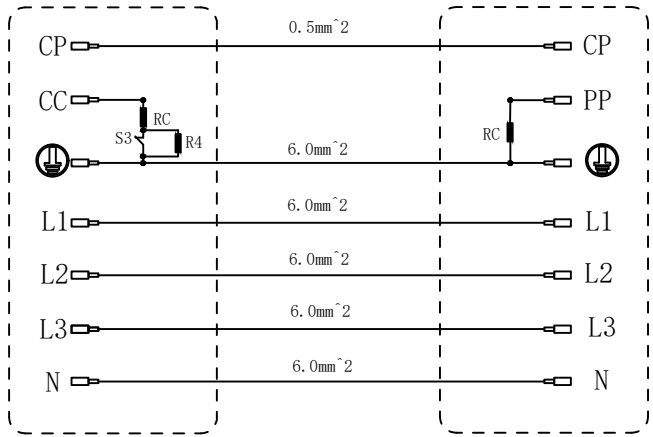
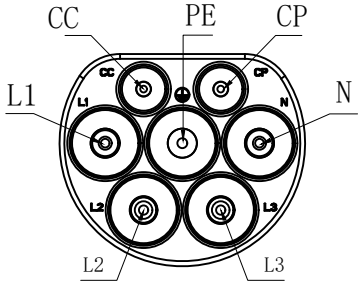


REV		MARK	Reasons for change	ECN	
A			First Release	Change content	Date
				TFR	2024.03.27

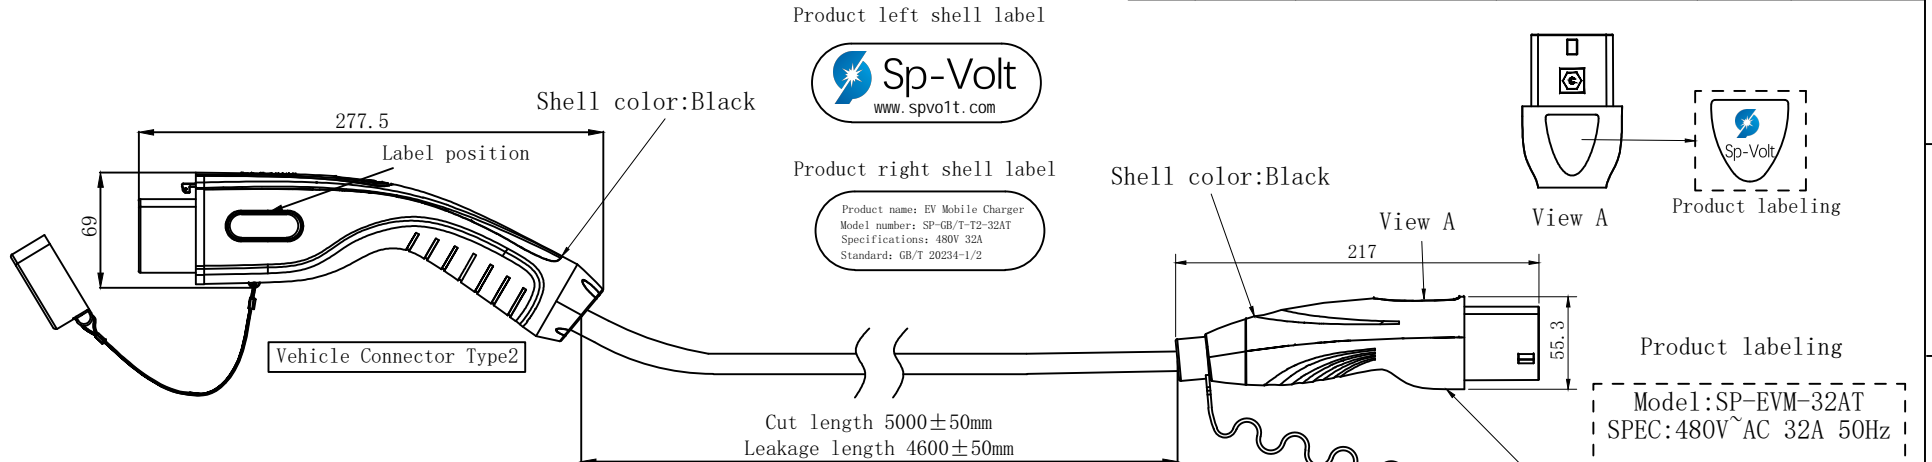

Technical Requirement:

- Product description: It meets the design and test requirements of IEC 62196-II e-2014;
- Product performance: Voltage rating 480V
Current rating 32A
Dielectric Withstanding Voltage >2500V
Ambient Temperature Range -40°C to +50°C
Ingress Protection IP54
- Appearance of the product: No oil stain, burr or other defects affecting the function of the product are found on the surface of the product.
- Resistance: RC, 220 Ω; R4, 3300 Ω

Customer signature:

- Control dimension: The dimension marked is the key dimension, which needs to be controlled.
- Environmental protection requirements: products meet RoHS requirements;

Approval	Check	Design	-Unnoted tolerance-		SPvolt EV Charging Cable Co.Ltd	
			Unit: mm	X ±0.30	info@spvolt.com	
			Sheet: A4	X.X ±0.20	Name:	TYPE2 TO TYPE2
			Scale:	X.XX ±0.10	Part number:	
			Page:	Angle ±1°	Draw number:	YT3-XC-25-2
			Material:	Weight:		