

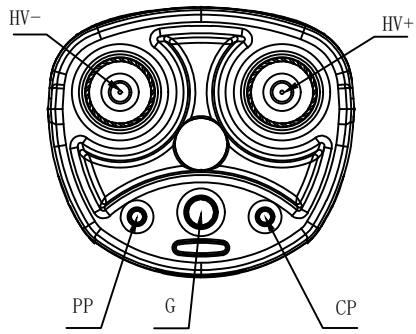
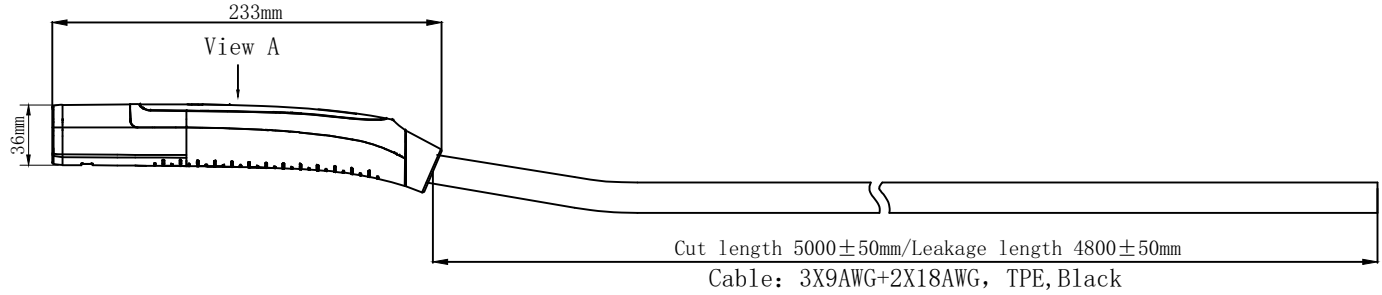


REV		MARK	Reasons for change	Change content	Name	Date
A			First Release		ZYY	2024. 04. 15

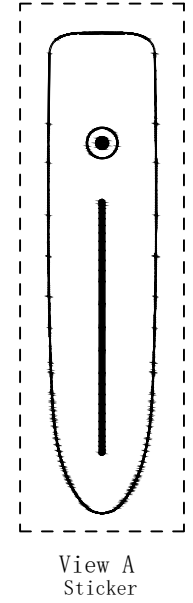

Vehicle Connector wiring diagram

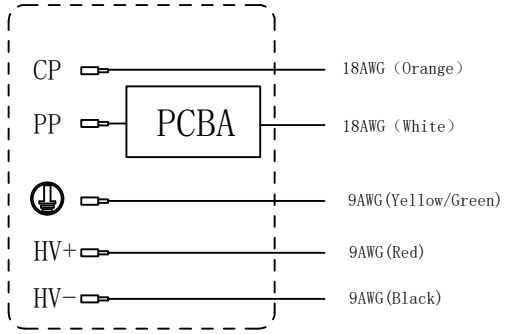

Technical Requirement:

- 1.Product description: It meets the design of NACS and test requirements of UL 2251;
- 2.Product performance: Voltage rating 240V
Current rating 40A
Dielectric Withstanding Voltage>2000V
- 3.Appearance of the product: No oil stain, burr or other defects affecting the function of the product are found on the surface of the product.
- 4.Resistance: R6, 150Ω; R7, 330Ω; (PCBA)
- 5.Control dimension: The dimension marked is the key dimension, which needs to be controlled.
- 6.Environmental protection requirements: products meet RoHs requirements;

Customer signature:



Approval	Check	Design		-Unnoted tolerance-	SPVOLT EV CHARGING CABLE CO. LTD		
				X	±0.30	Name:	NACS Vehicle Connector
				X.X	±0.20	Part number:	
				X.XX	±0.10	Draw number:	YT4-XC-TSL-03
				Angle	±1°		
			Material:	Weight:			