



PRODUCT NAME:

CCS2 TO TESLA DC & AC ADAPTER

APPLICATION:

- For Tesla Model S/X/3/Y newer than 2020.06 adaptor will work without retrofit kit on DC chargers and V2 superchargers. If you need to use V3 Supercharger you need to install following listed retrofit kits.
 Model S built before 2016.06 - 1489302-00-B,
 Model S built after 2016.06 - 1487929-00-B,
 Model X built between 2015.09 and 2021.01 - 1506266-00-B,
 Model 3 built before Restyle - 1092755-82-B,
 Restyle Model 3 - 1537264-20-B,
- We design a switch on product to suit different years car requirement as below image shown.



Press out: Suitable for tesla model 2017/2018/2019 3/x/s/y



Press in: Suitable for tesla model 2020/2021 3/x/s/y




SPECIFICATIONS:

- Current: Max. 200A
- Operating voltage: 300~1,000V DC
- Insulation resistance: >1,000mΩ
- Contact resistance: <5mΩ
- Flame retardant grade: UL94-V0
- Operating temperature: -30°C ~ 50°C
- Pins: Copper alloy, silver plated
- Service life: >10,000 times

- Housing material: Plastic (PC + ABS)
- Storage temperature: -40°C ~ +85°C
- Protection grade: IP54
Protection from dirt, dust, oil, and other non-corrosive material. Complete protection from contact with enclosed equipment. Protection from water, up to water projected by a nozzle against enclosure from any direction.

TRAVEL STORAGE BAG:

- The protect case provide full protection, CCS2 to Tesla DC & AC adapter storage case is made of premium eva, which is shockproof and dust resistance and skid-proof against impact.

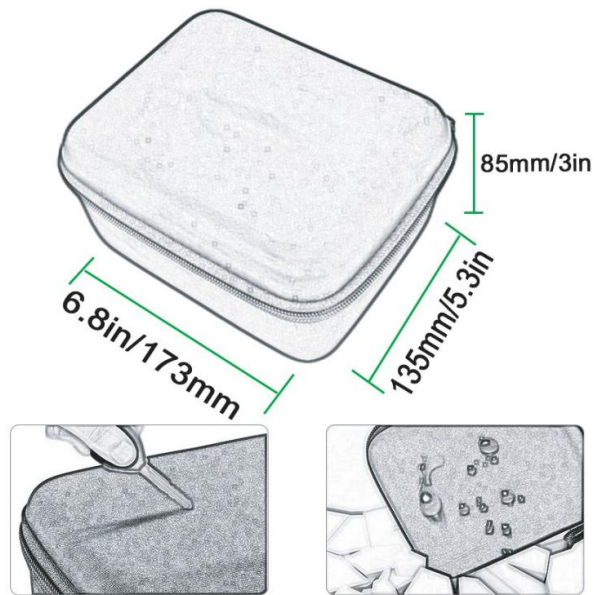


CHARGER LOCK:

NACS charger lock is small in size, easy to store, used with CCS2 adapter, easy to install. Don't worry, the adapter can't be disconnected as long as your car is locked, so you can be at peace of mind when charging your vehicle.

HOW TO USE:

Simply plug your CCS Plug into the charging station first and then into your Tesla. To remove it from your vehicle, simply authorize it from your car or your phone.

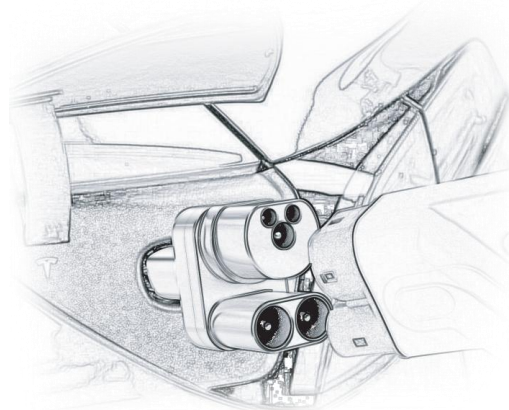

COMPATIBILITY:

- This adapter is compatible with CCS2 standard charging systems. It may not be suitable for regions predominantly using the CCS1 standard.
- NACS Supercharger CCS2 Adapter suit for Tesla Model S 3 X Y, rated for any Level 2 Fast Charging Station with CCS Plug across North European. Adapter is rated for up to 250KW and 250A, the power depends on many factors, such as your vehicle specs. Our adapter works on any fast-charging stations without any issues.



TROUBLESHOOTING:

Be mindful of these specific scenarios when using AC charging, especially with original Tesla chargers:

- Tesla Mobile Charger (1121254-00-E): Upon first connection, a red button may appear. Please wait 15 minutes before charging begins. This is a one-time requirement for initial use.
- Tesla Wall Connector (Part Numbers 1529455): With a Tesla Wall Connector, press the reset button prior to starting the charging process.

Note:

These instructions are specifically for Tesla's original charging equipment. Chargers from other brands typically operate without additional steps.

CAUTIONS:

- It's not a toy, keep away from your children.
- Clean only with dry cloth.
- Avoid dismantling, dropping or heavy impact.

STORAGE AND MAINTENANCE:

- Store the adapter in a cool, dry place.
- Regularly inspect the adapter for any signs of wear or damage.
- Clean the adapter with a dry cloth; do not use water or solvents.

WARRANTY:

- This product includes a 1-year warranty.
- In case of misuse, mishandling, negligence, vehicle accidents or modifications, the warranty will be voided. Our warranty only covers manufacturing defects.